


## Specifications

<b>Airflow</b>	1,000 CFM	
<b>Cabinet</b>	16 gauge steel cabinet with powder coated chemical resistant baked enamel with ivory textured finish	
<b>Power Input</b>	115 VAC, 60Hz, 1 ph 230 VAC, 60 Hz, 1 ph	
<b>Motor Options</b>	1 HP, 1-1/2 HP	
<b>Blower Options</b>	Belt-driven, forward-curved	
<b>Filter Options: Prefilter</b>	Two 12" x 24" x 2" mist impingers One 12" x 24" x 4" pleated prefilter MERV 8	
<b>Filter Options: Primary</b>	One 12" x 24" x 26" MERV 14 bag filter One 12" x 24" x 26" MERV 13 bag filter	One 12" x 24" x 12" polypropylene ESF MERV 14 One 12" x 24" x 12" polypropylene ESF MERV 13
<b>Accessories</b>	One to two 22 lbs. odor modules	Wall mount arm
<b>Weight</b>	305 lbs. installed; 340 lbs. shipping	
<b>Features and Benefits</b>	<ul style="list-style-type: none"> <li>• Standard 1 HP and optional 1-1/2 HP belt-drive blower with adjustable sheave to handle a wide range of applications</li> <li>• Dirty filter gauge for easy monitoring of filter status</li> <li>• Power indicator light</li> <li>• 10-foot power cord with molded plug</li> <li>• Dual 8" collars for duct installation flexibility</li> </ul>	
	<ul style="list-style-type: none"> <li>• Standard size prefilter and main filter track size allows for the use of a variety of filter media for a wide range of applications</li> <li>• Drain connection to return collected oil/coolant back to the machine tool or to collect anything that drains off the filters in the air cleaner</li> </ul>	

Specifications subject to change without notice

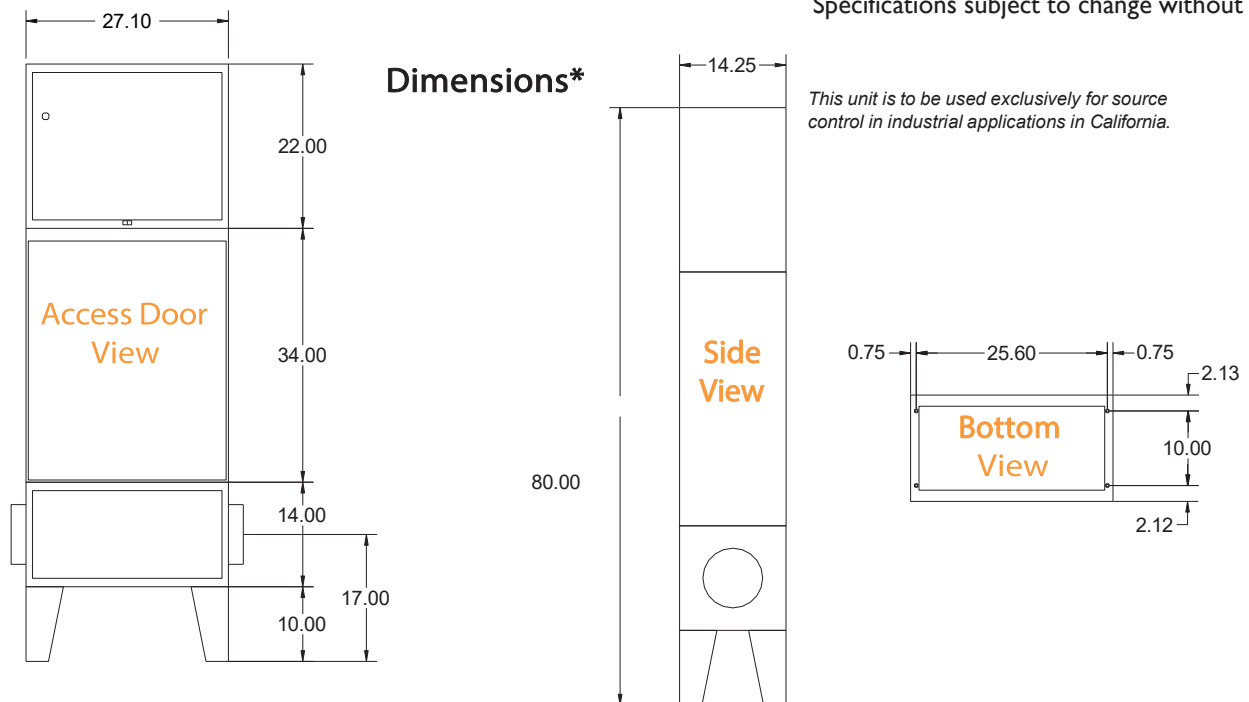

\*All measurements in inches